

# UVE-210

Cámara videoconferencia PTZ




**UVE-210** is a software video conferencing suite or audio and video kit for collaborative office system. It has built-in 10X 1080P wide-angle lens. the kits including an omnidirectional USB microphone. which can be collected voice at a distance of 3 meters. It is suitable for small professional conference rooms or UC unified communication and instant messaging software within 30 square meters. It is compatible with various conference Skype for business, Cisco Zoom, WebEx APKs or video conferencing software, and is the best choice for software video conferencing solution.

## Compatibility

Windows 7/8/8.1/10, Mac OS X, Android & Linus System, BlueJeans, Easymeeting, Cisco Jabber ® and WebEx ® ,Citrix ®, GoToMeeting, Google Hangouts, Microsoft ® Skype , Gruveo, Zoom, and Skype for Business, Vidyo , Konftel , Avaya , Starleaf , Kontel, Trueconf , Polycom, Lifesize etc API or VC Software

## Functions

- Suitable for meeting room size up to 20~30 square meters.
- Support for on-site meetings of up to 8-10 people.
- Built-in VISCA, PELCO P/D multiple control protocols
- Support USB or RS232/RS485 interface to control
- Ultra-quiet pan/tilt design, horizontal 178°, vertical -30°~ +90° rotation
- Over-New Mini compact structure, direct driven by imported high-precision stepper motor, accuracy less than 0.01°
- Video output supports up to 1080P@30fps
- USB 2.0 video output, plug and play
- Support ceiling, wall mount, tripod multiple installation of methods
- Strong compatibility, support Windows, Android system, Linux, Mac, IOS


<b>Camera</b>	
Video System	1920*1080; 1280*720; 640*480; 640*360; 352*288; 320*240
Sensor	1/2.8", CMOS, Effective Pixel: 2.07M
Lens	10x, f5.1mm ~ 51mm, F1.8 ~ F2.8
Minimal Illumination	0.5 Lux @ (F1.8, AGC ON)
Shutter	1/30s ~ 1/10000s
White Balance	Auto, Indoor, Outdoor, One Push, Manual
Backlight Compensation	support
Digital Noise Reduction	2D & 3D Support
S/N Ratio	≥55dB
Horizontal Angle of View	72°
Horizontal Rotation Range	±178°
Vertical Rotation Range	-30° ~ +90°
Pan Speed Range	0.1° ~ 100°/s
Tilt Speed Range	0.1° ~ 80°/s
Image Mirror	SUPPORT
Image Flip	SUPPORT
Number of Preset	Max 255( 9Presets by Remote)
Accuracy	0.01°
<b>USB Functions</b>	
Operate System	Windows XP, Windows 7, Windows 8/8.1/10, Mac OS X, Linux
Color System / Compression	H.264 / MJPEG
Video Format	1920*1080; 1280*720; 640*480; 640*360; 352*288; 320*240
Audio on USB	
USB Video Protocol	UVC 1.0 ~ UVC 1.5
UVC	Support
<b>Input/ Output</b>	
USB Interface	1*USB2.0: Type B female jack
Communication Interface	1xRS232 In: 8pin Min DIN, Max Distance: 30m, Protocol: VISCA/Pelco-D/Pelco-P
Power Jack	JEITA type (DC IN 12V)
<b>Generic</b>	
Input Voltage	DC 12V
Current Consumption	1.0A (max)
Operating Temperature	0°C ~ 40°
Power Consumption	12W (max)
Size(mm)	120mm x 135mm x 120mm
Gross Weight	1.2kgs
<b>Products Picture</b>	

<b>Products Picture</b>			
<b>Full-duplex Speakerphone</b> <b>Desk Speaker &amp; Microphone</b>	<b>Standard</b>		
<b>Input/Output</b>			
<b>USB</b>	USB interface to PC OR USB Hub Device		
<b>IN/OUT</b>	Analog Line In/Out, Mobile, PC, Conferencing Interface		
<b>Earphone</b>	3.5mm Earphone or Extend		
<b>Power</b>	Micro 5Pin USB Interface		
<b>Microphone Frequency</b>	100Hz-22KHz		
<b>Speaker Frequency</b>	100Hz-22KHz		
<b>Speaker Volume</b>	85dB		
<b>Microphone Coverge</b>	3Meters		
<b>Main Features</b>	Deep Echo Cancellation Dynamic Noise Suppression Automatic Gain Control		
<b>Key Button functions</b>	Power On/OFF Phone Pickup /Hang off Voice Increase / Reduce /Mute		
<p>BlueJeans,          Easymeeting,          Cisco Jabber ® and          WebEx ® ,Citrix ®,          GoToMeeting,          Google Hangouts,          Microsoft ® Skype ,          Gruevo,          Zoom, and          Skype for Business,          Vidyo ,          Konftel ,          Avaya ,          Starleaf ,          Kontel,          Trueconf ,          Polycom,          Lifesize etc API or VC          Software</p>			



<b>Full-duplex Speakerphone</b> <b>Desk Speaker &amp; Microphone</b>	Optional	
---	----------	--


<b>Input/Output</b>	
<b>USB</b>	USB interface to PC OR USB Hub Device
<b>IN/OUT</b>	Analog Line In/Out, Mobile, PC, Conferencing Interface
<b>Earphone</b>	3.5mm Earphone or Extend
<b>Power</b>	Micro 5Pin USB Interface
<b>Microphone Frequency</b>	100Hz-22KHz
<b>Speaker Frequency</b>	100Hz-22KHz
<b>Speaker Volume</b>	85dB
<b>Microphone Coverge</b>	3Meters
<b>Main Features</b>	Deep Echo Cancellation Dynamic Noise Suppression Automatic Gain Control
<b>Key Button functions</b>	Power On/OFF Phone Pickup /Hang off Voice Increase / Reduce /Mute

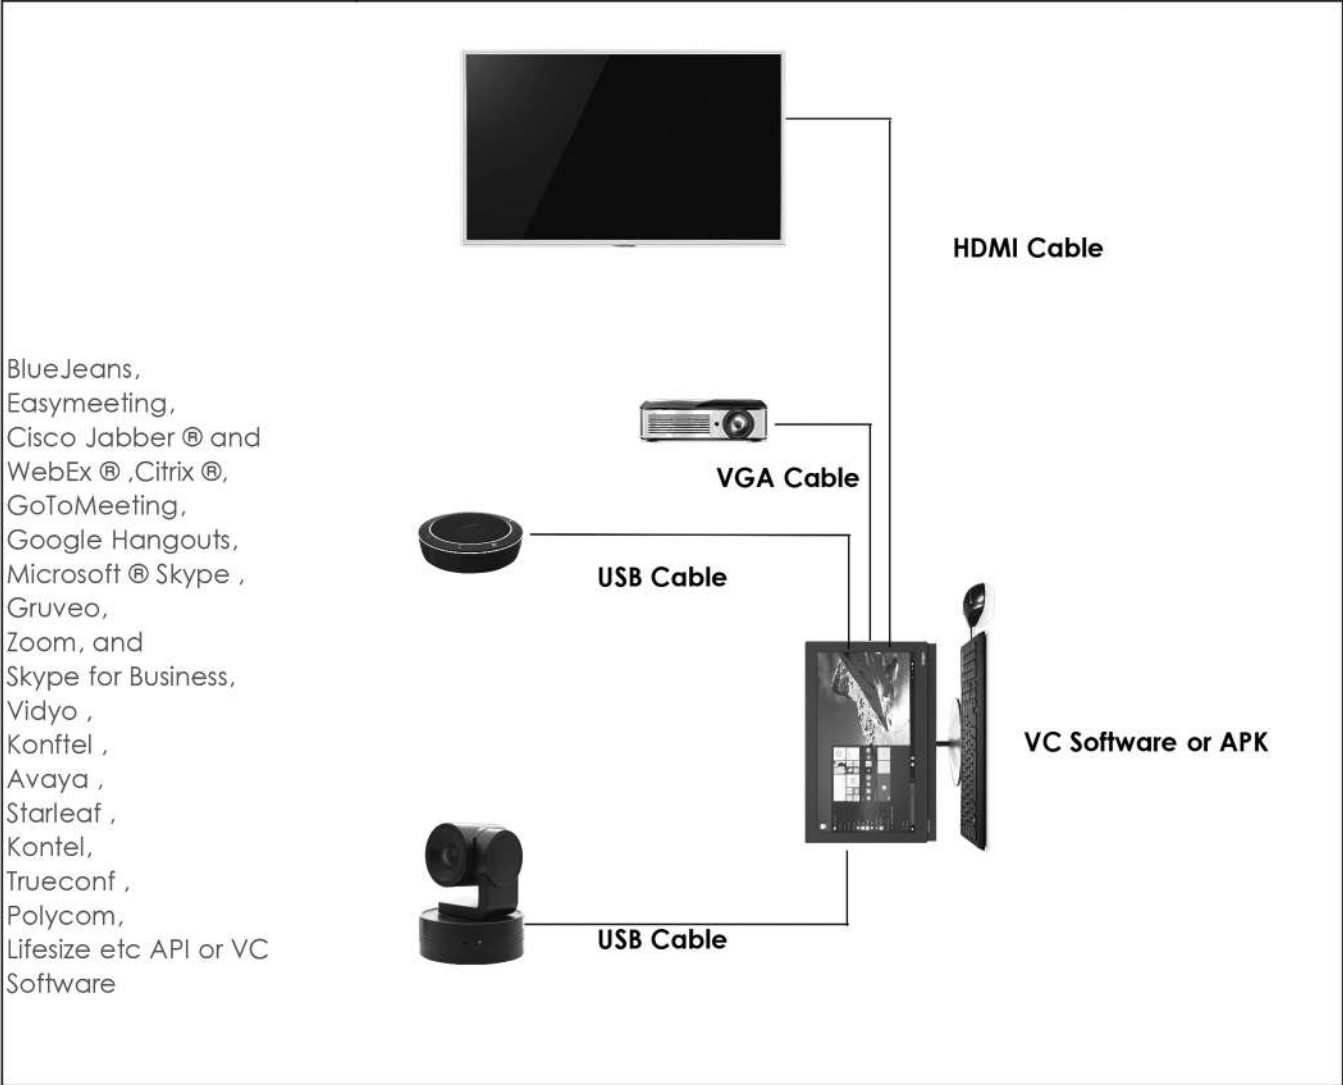



<b>Full-duplex Speakerphone</b> <b>Desk Speaker &amp; Microphone</b>	<b>Optional</b>	
---	-----------------	--

<b>Input/Output</b>	
USB	USB interface to PC OR USB Hub Device
IN/OUT	Analog Line In/Out, Mobile, PC, Conferencing Interface
Earphone	3.5mm Earphone or Extend
Power	Micro 5Pin USB Interface
Microphone Frequency	100Hz-22KHz
Speaker Frequency	100Hz-22KHz
Speaker Volume	85dB
Microphone Coverage	3Meters
Main Features	Deep Echo Cancellation Dynamic Noise Suppression Automatic Gain Control
Key Button functions	Power On/OFF Phone Pickup /Hang off Voice Increase / Reduce /Mute

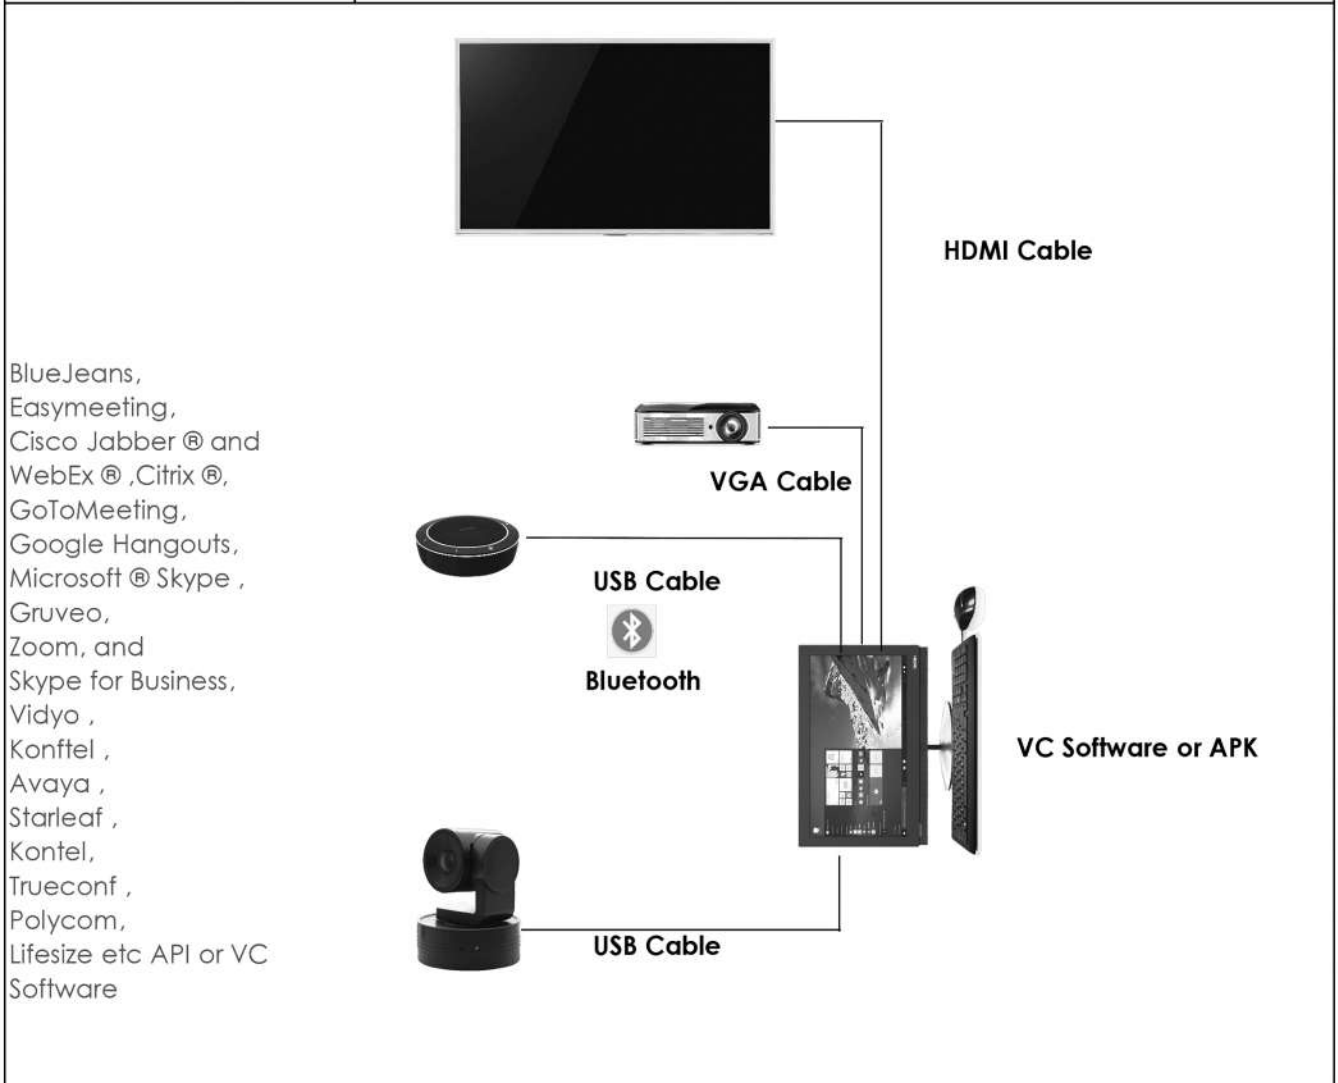



Full-duplex Speakerphone <b>Desk Speaker &amp; Microphone</b>	Optional
--	----------

<b>Input/Output</b>	
USB	USB interface to PC OR USB Hub Device
IN/OUT	Analog Line In/Out, Mobile, PC, Conferencing Interface
Earphone	3.5mm Earphone or Extend
Power	Micro 5Pin USB Interface
Microphone Frequency	100Hz-22KHz
Speaker Frequency	100Hz-22KHz
Speaker Volume	85dB
Microphone Coverage	3Meters
Main Features	Deep Echo Cancellation Dynamic Noise Suppression Automatic Gain Control
Key Button functions	Power On/OFF Phone Pickup /Hang off Voice Increase / Reduce /Mute

